

Coaxial Cable Connector: S-F115/SR034QA

Description

SMA Straight cable jack solder type cable.034

Interface standards

MIL-C-39012

Technical Data

Electrical Data

Impedance	50 Ω
Interface frequency max.	18 GHz
VSWR	1.03+0.015 \times f(GHz) max
Voltage rating	500 V(rms)
Test voltage	1000 V(rms)
Contact resistance:	
Center conductor	\leq 3m Ω
Out conductor	\leq 2m Ω
Insulation resistance	\geq 5000M Ω

Mechanical Data

Weight	2.3 g
Durability	500 Cycles

Environmental Data

Operating Temperature	-65 $^{\circ}$ C to 165 $^{\circ}$ C
-----------------------	--------------------------------------


Material Data

Piece Parts

Center contact	Beryllium copper
Body	Brass
Insulator	PTFE


Surface Plating(μ m)

Gold 0.5 over Nickel 2.0
Gold 0.2 over Nickel 2.0

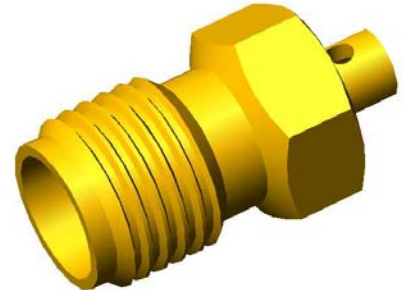

Coaxial Cable Connector: S-F115/SR034QA

Outline drawing

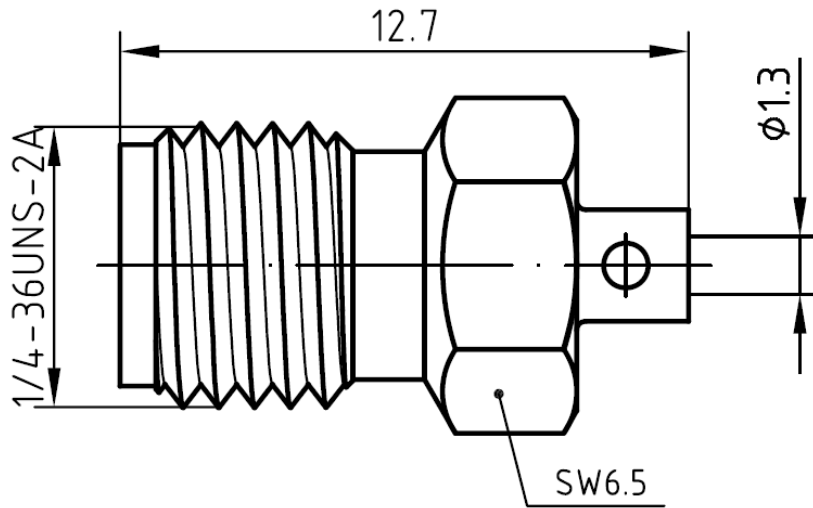

Packaging

Standard

Other

200/Box=20 Bag

Contact us